

Polaris RZR 570 Silencer p/n 09-115

Kit Contents:

- 1 - Bolt p/n 999-0156
- 2 - Zipties p/n 999-5431
- 1 - Spring Tab p/n 090-697
- 3 - Hair Pins p/n 998-5612
- 3 - Flat Washers p/n 999-0078
- 1 - Short Spring p/n 090-40

Installation Instructions:


Step 1-

Remove the rear bumper, unplug rear tail lights, and cut two zip ties holding wires to the frame.

Step 2 -

Remove springs from the original silencer to head pipe connection. Unbolt the rear bumper support from the main frame.

Note: Rear bumper support is what the silencer is hanging from.

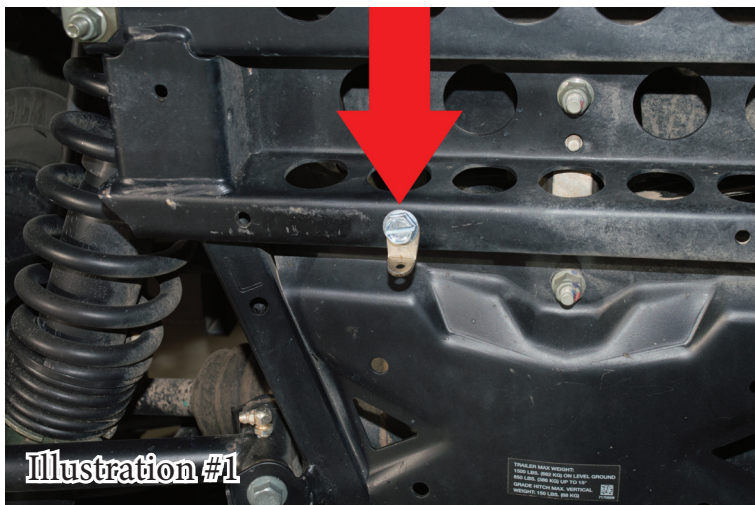

Step 3 -

On the crossbar below the sway bar, from the drivers side to the second hole in, (see illustration #1) install spring tab using the supplied self tapping bolt with spring tab pointing down.

Step 4 -

Remove the stock silencer from rear bumper bracket and install SLP silencer in the same location as stock. When installed onto rubber hanger brackets install a flat washer and provided hair pin clips onto the end of the hanger brackets.

Step 5 -

Reinstall rear bumper bracket and spring silencer into place. Two springs will install between the silencer and the inlet coupler and one from the spring tab to the bottom of the silencer.

Step 6 -

Install tail light wire harness over rear bumper bracket and as far forward as possible. Using supplied zipties, tie wire into place (see illustration #2). Reinstall rear bumper.

